




ANCHOR[®]

LIBERTY


BLUETOOTH INSTALLATION

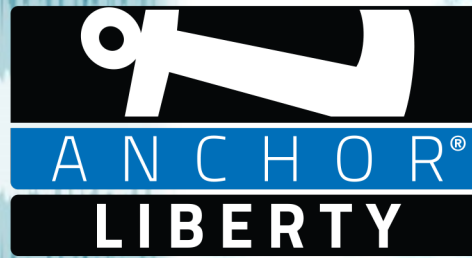

REQUIREMENTS:


- 8,000 or series 2 Go Getter unit with I/O board at revision E (or newer)
- Screw drivers (Phillips #1 and #2)
- 8 mm Nutdriver



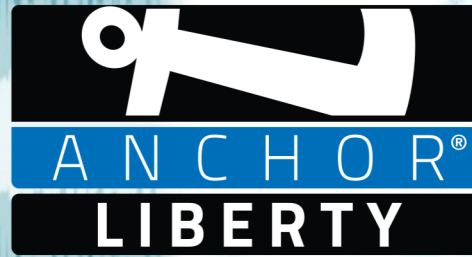


INSTRUCTIONS:

1. Make sure the unit is powered off and the plug is disconnected.

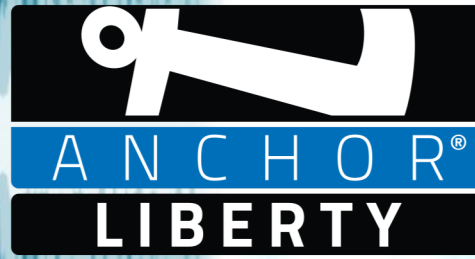


INSTRUCTIONS:

2. Remove the screws around the back panel.

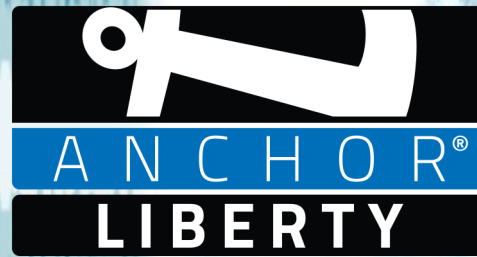


INSTRUCTIONS:

3. Remove the back panel.

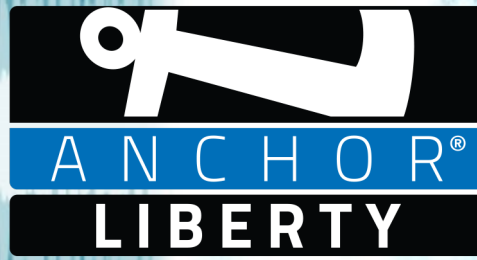


INSTRUCTIONS:

4. Remove the battery harness.

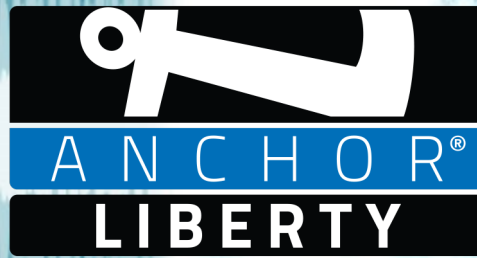


INSTRUCTIONS:

5. Remove the low and high and speaker harness
 - a. If applicable please remove the mic receiver harness

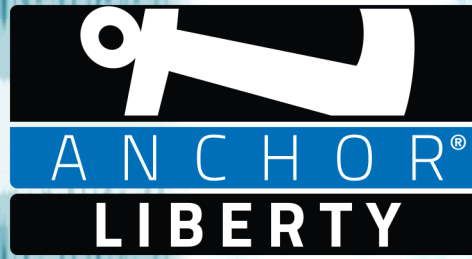


INSTRUCTIONS:

6. Remove the old Bluetooth module.

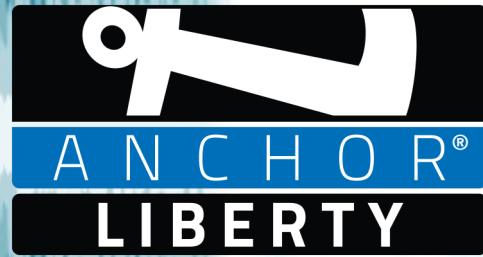


INSTRUCTIONS:

7. Remove the old harness from the Bluetooth module and use the included harnesses with the new Bluetooth module.

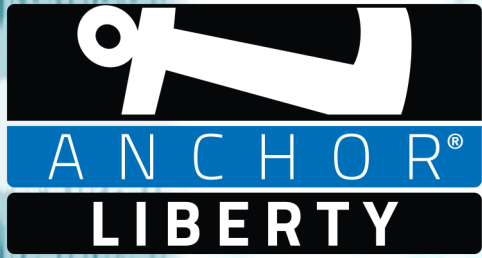


INSTRUCTIONS:

8. Connect the black and white audio cables to BT Audio.

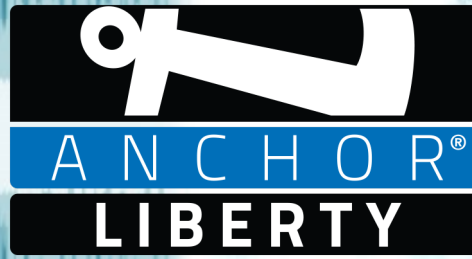

INSTRUCTIONS:

9. Connect the red and black cables to BT only.

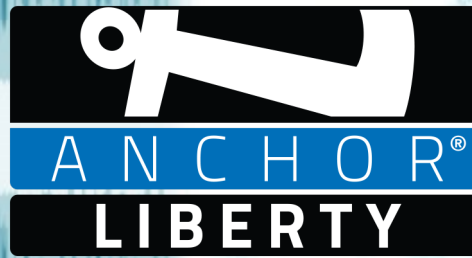

INSTRUCTIONS:

10. Reinstall the back panel to the unit and tighten with screws.